




Part Number: LTKJ-UTPC6-180

Cat.6 UTP Keystone Jack 180° LIFE TECH

Product Description

Life Tech Cat.6 UTP 180 degree punch down keystone jack is designed and manufactured according to TIA/EIA-568-C2 specifications, it is an essential element of Structured Cabling System. This type of jack is easily fit to patch panels, also faceplate (not recommend).

Structure

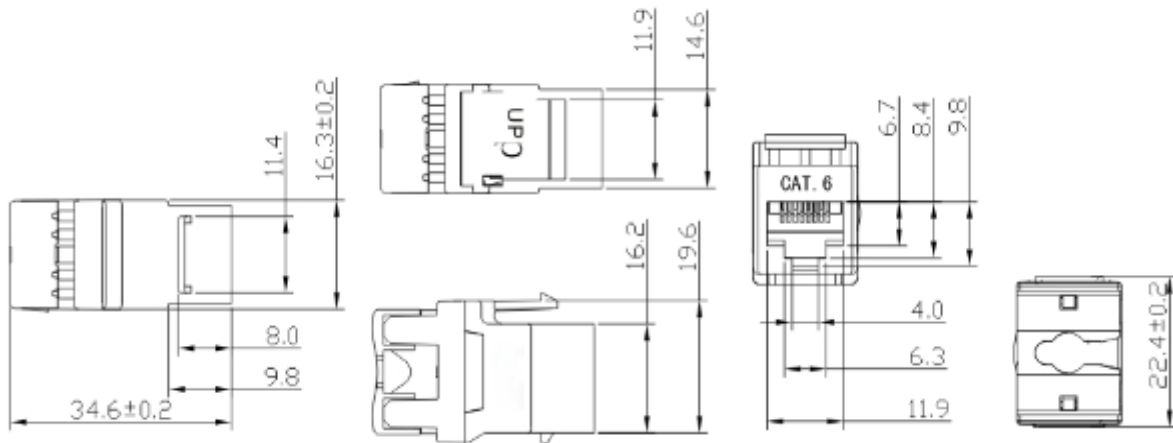

Technical Specifications

| | |
|----------------------------------|--|
| RJ45 Housing | PC |
| IDC House | PC |
| RJ45 Contact material & finished | Phosphor Bronze with 50-60" Nickel plated |
| | Contact area: Min. 3mm 3" Gold plated |
| IDC Terminal material & finished | Phosphor Bronze with 50" Tin-Lead plated. over 50-60 " Nickel plated |
| | 110 tool compatible |
| | Use for 23-24AWG stranded and solid wire |
| Property | The IDC color combine |
| Insertion Force | 900 grams for 8 contacts. |
| Retention Strength | 7.7 kgs between jack and plug |
| Operation Temperature | -30° C to 70° C |
| Jack Durability | Jack: 750 cycles Plug-Jack mating and unmating test. Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles. |
| IDC Durability | Max. 200 pinching times. |
| Standards compliant | Performance is in compliance with the TIA/EIA-568-C2 |